



# LOW TEMPERATURE UNDERCOUNTER DISHWASHER / GLASSWASHER

## L-1C



### CMA MODEL: L-1C

Introducing CMA's "Noise Suppression Technology" combining sophisticated pump engineering, double wall construction and sound deadening materials has reduced noise output to 50%, without sacrificing horse power or pump pressure. This is the ideal "behind the bar" dishmachine providing outstanding results, economical water usage and quiet operation. The built in chemical dispensing system is programmable to provide precise chemical dosage per cycle.



Universal Pedestal



CMA Temp-Sure  
(Self contained 12kW heater)

### FEATURES

- New Noise Suppression Technology (NST).
- 30 racks / 120 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All stainless steel construction assures long life and years of trouble-free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Double skin stainless steel provides consistent heating and a quiet operation.
- Built-in chemical pumps assure proper chemical usage.
- Deliming system.
- Pumped drain allows for flexible installation. Requires no floor drain.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.
- Water inlet comes with built-in strainer, prevents debris from clogging the water valve.
- 4" Stainless Steel Legs.
- Dishmachine comes with one 16 compartment rack.
- Large 11" door clearance to accommodate all size glasses.
- Sustainer Heater.

### AVAILABLE OPTIONS

- Low Chemical Alarm
- 48" Undercounter Dishtable
- 6" Stainless Steel Legs
- Roller Casters
- Drain Board



Registered Trademark






**L-1C**  
Chemical Sanitizing  
Undercounter  
Dishwasher / Glasswasher

**WARNINGS:**

- Electrical and Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishwasher.

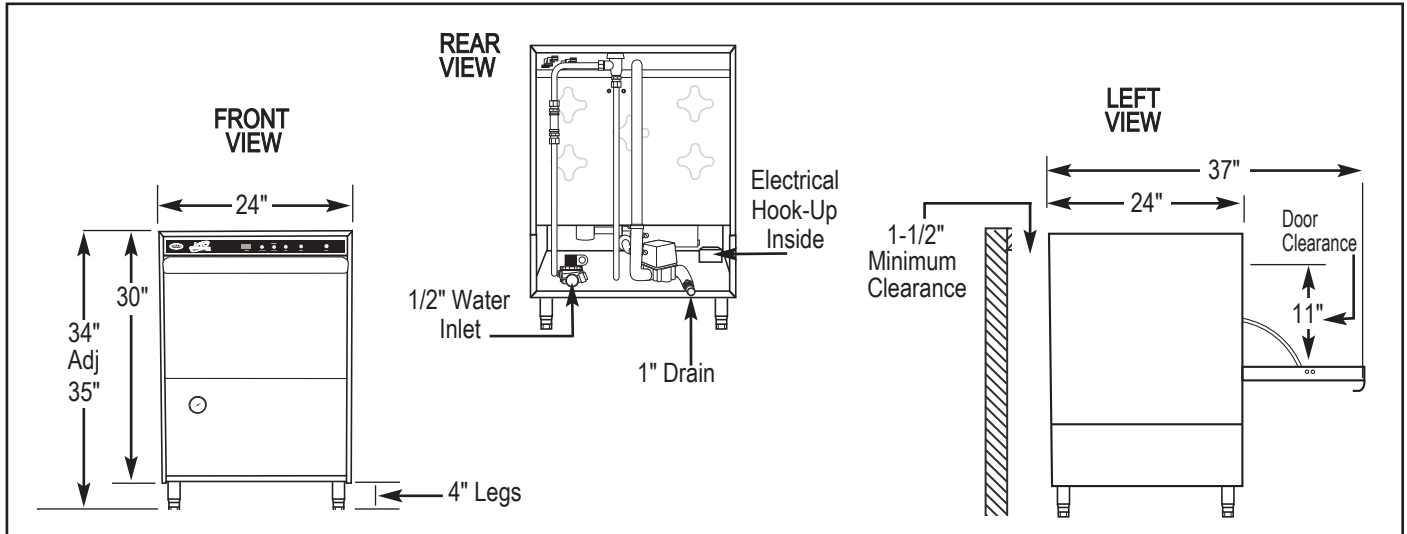

**Specifications:**

MODEL L-1C	USA	METRIC		USA	METRIC
<b>OPERATING CAPACITY</b>			<b>WASH PUMP MOTORS HP</b>	1	1
RACKS PER HOUR (NSF RATED)	30	30	<b>DIMENSIONS</b>		
<b>OPERATING CYCLE</b>			DEPTH	24"	(61cm)
WASH TIME-SEC	58	58	WIDTH	24"	(61cm)
RINSE TIME-SEC	32	32	HEIGHT	34"-35"	(86.3-88.9 cm)
DWELL/PURGE-SEC	30	30	MAXIMUM CLEARANCE HEIGHT FOR WARES	11"	(28cm)
TOTAL CYCLE TIME	2 MIN	2 MIN	<b>STANDARD DISHRACK</b>	1	1
WASH TANK CAPACITY	1.7 GAL.	(6.43 L)	DIMENSIONS	20" x 20"	(50.8 x 50.8cm)
WASH PUMP CAPACITY	35 GPM	(132 LPM)	<b>ELECTRICAL RATING</b>	<b>VOLTS</b>	<b>AMPS</b>
<b>OPERATING TEMPERATURE</b>				115	16
REQUIRED	120°F	(49°C)	<b>APPROXIMATE SHIPPING WEIGHT</b>	203#	(92kg)
RECOMMENDED	140°F	(60°C)	<b>SHIPPING DIMENSIONS</b>	PALLET & BOX @ 29" X 28" X 38"	
<b>WATER CONSUMPTION</b>					
PER RACK	1.7 GAL.	(6.43 L)			
PER HOUR	51 GPH	(192.9 LPH)			
WATER INLET	1/2"	(1.27cm)			
DRAIN	1"	(2.54cm)			

**Summary Specifications: Model L-1C**

CMA model L-1C, low temperature, undercounter, chemical sanitizing, commercial dishwasher meets NSF, UL and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model L-1C is constructed entirely of stainless steel. Automatically washes, rinses and sanitizes food service utensils in standard 19-3/4"X19-3/4" racks. This model comes standard with upper and lower stainless steel wash arms. The L-1C incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

**New Innovative Noise Suppression Technology (NST)**

**Advisory:** CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.



CMA Dishmachines 17707 Valley View Ave; Cerritos, CA 90703 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

© 09-2024 CMA, Inc.

